


Datasheet

LC Attenuator

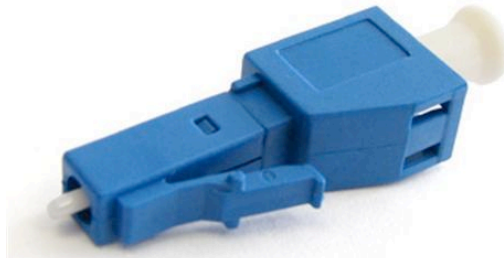

Features:

1. 100% test before shipment
2. Bellcore Compliance
3. Wavelength Independent (DWDM)
4. Durability (well over 100mw)
5. Simple and Reliable Structure
6. High Precision Dimensions
7. ROHS Compliance

Specification:

Parameter		Description
Basic	Type	LC
	Ferrule End-face	SPC
	Mode	Single Mode
	Attenuation	1dB, 2dB, 5dB, 10dB
	Tolerance	+/-0.5dB
	Return Loss	>50dB
	PDL	≤0.2dB
	Optical Input Power	≤200mW
	Operation Temperature	-40 ~ 80℃